7 Instantiation in C++ (3)

★ **Constructor**

➔ Method for the initialization of objects

- method name = class name
  - ➤ method is automatically invoked during instantiation
- Example:

```
class Counter {
  private:
    int value;
  public:
    Counter(int c){ value = c; }        // constructor
    void incr()   { value++; }
   ...
};
...
Counter c1(20);        // create c1, initialize value to 20
cp = new Counter(30);
```


Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

8 Objects and Classes in Java

★ **Essential Differences to C++**

- No static instantiation
- Dynamic instantiation ➔ only references (pointers) to objects
  - ◆ access to object components through object reference and operator .
- No need to delete objects explicitly
  - ◆ automatic garbage collection
- Methods are implemented always in the class declaration
  - ◆ but no in-line mechanism
- No pointer arithmetic

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

9 Inheritance

- Relationship among classes where one class shares the structure and/or behavior defined in another class / other classes



inheritence hierarchy



instance of an inheriting class

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

9 Inheritance (2)

★ **Terms**

- **Superclass / base class:** class from which another class inherits
- **Subclass:** class which inherits from other class(es)
- **Single inheritance:** subclass has exactly one superclass
- **Multiple inheritance:** subclass has several superclasses



single inheritence



multiple inheritence

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

9 Inheritance (3)

★ **Software developer's view**

- Specialization / generalization of classes
- Common aspects of classes are collected in a superclass
- Hierarchy of abstractions:
  - ◆ from more general classes to specialized classes and vice versa
- Documentation of the relationship between classes

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

9 Inheritance (4)

★ **Program-technical point of view**

- Extension of an existing class implementations
  - ➤ additional methods
  - ➤ additional data
- Code reusage:
  no reimplementation of inherited data and methods necessary
- Reimplementation of a method is *possible*, if the method of the superclass is not appropriate for the subclass
- Methods of the superclass can be invoked at an object of the subclass
- Modifications of a superclass effect all subclasses
  (central maintenance)

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

9 Inheritance (5)

★ **Reimplementation**

- Reimplementation of a method:
  - ➤ hides the method of the superclass



  - ➤ default behavior: invocation of the subclasses' method
  - ➤ invocation of the reimplemented method of the superclass?

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

9 Inheritance (6)

★ **Multiple Inheritance**

- Problems:
  - ➤ naming conflicts of variables or methods of the different superclasses
  - ➤ inheritance of the same superclass through different paths



- Application:
  - ➤ less important for code reusage
  - ➤ very important to describe type conformance (see section about typing)

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

10 Inheritance in C++

- Subclass inherits variables and methods of the superclass
- Subclass may modify superclass
  - ➤ additional methods and variables
  - ➤ modified methods
- Methods of the subclass may access *public* and *protected* components of the superclass
  - ➤ public superclass
    - ➔ the *interface* of the superclass is inherited
  - ➤ private superclass
    - ➔ the *interface* of the superclass is *not* inherited
    - ➔ objects of the subclass are not type-conform
- *private* data and methods of the superclass are not visible for methods of the subclass

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

10 Inheritance in C++ (2)

★ **Example (1)**

```
// Class counter
class Counter
{
  protected:
    int value;
  public:
    void incr() { value++; }
    void decr() { value--; }
    int get_value() { return value; }
};

// Subclass resettable counter
class RCounter : public Counter
{
  private:
    int initial;
  public:
    RCounter(int v)       { initial = v; value = v; }
    void reset()          { value = initial; }
};
```


Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

10 Inheritance in C++ (3)

★ **Example (2)**

```
// Class window
class Window
{
  protected:
    int x, y, width, height;
  public:
    virtual void init(int x, int y, int w, int h){ initialize }
    virtual void move(int x, int y) { move window }
    virtual void display() { display window }
    virtual void delete() { remove window }
};

// Subclass bordered window
class BorderedWindow: public Window
{
  public:
    virtual void display() { display bordered window }
    virtual void change_width(int x) { change width }
    virtual void change_hight(int y) { change hight }
};
```


Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

11 Dynamic Binding

- Decision which method to execute at run time (dynamic)

```
Window *w = new BorderedWindow();
w->display();
```

- This is also true if an object invokes a method at itself!
  - ◆ Example:
    - – `move()` finally calls `display()` to redraw the window
    - – `BorderedWindow` inherits `move()` from `Window`
    - – invoking `move()` at an instance of `BorderedWindow` finally calls `display()` of `BorderedWindow`



the pointer *this* always references the "whole object" and not just the part of the superclass

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

11 Dynamic Binding (2)

- Without dynamic binding
  "true inheritance" is not possible
  - → self reference (pointer *this*) is not adjusted correctly



★ **Static Binding**
Decision which implementation of a method is taken at compile time (depending on the type of the pointer)

- In C++ only "virtual" methods are bound dynamic
  - ◆ other methods are generally bound static
- In Java all methods are bound dynamic
  - ◆ static binding can be enforced by the keyword **final** in the method declaration
  - ◆ such methods cannot be reimplemented in subclasses

```
public final void incr() { value += step; }
```


Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

1 Generations of Programming Languages (2)

- *The Generation Gap* (1970 - 1980)
  many different languages were invented, but few endured …
  - ◆ C
  - ◆ Modula
  - ◆ Ada
- Object-oriented programming languages (1980 - today)
  - ◆ Smalltalk (successor to Simula)
  - ◆ C++ (evolved from C and Simula)
  - ◆ Eiffel (evolved from Simula and Ada)
  - ◆ Java

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

C.6 The Evolution of the Object Model

1 Generations of Programming Languages

- First generation (1954 - 1958)
  - ◆ Mathematical Expressions (FORTRAN I, ALGOL 58)
- Second generation (1959 - 1961)
  - ◆ Subroutines, separate compilation (FORTRAN II)
  - ◆ Block structure, data types (ALGOL 60)
  - ◆ Data description, file handling (COBOL)
  - ◆ List processing, pointers, garbage collection (Lisp)
- Third generation (1962 - 1970)
  - ◆ various successors to ALGOL 60 (ALOGOL 68, Pascal)
  - ◆ Classes, data abstraction (Simula)

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

C.7 Fundamental Concepts of the OO Paradigm

- Abstraction
  - ◆ Encapsulation
  - ◆ Abstract data type
- Modularization
- Hierarchy
- Typing
  - ◆ Hierarchy of types
  - ◆ Polymorphism
  - ◆ Genericity
- Concurrency
- Persistence

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

1 Abstraction

Fundamental concept for solving complex problems

- Emphasize details which are relevant for the entire solution
- Suppress details which are (for the moment) immaterial or diversionary

→ Object orientation
- important:
  - ➤ Signature of an object
  - ➤ Semantics of an object

  } Outside view

    ➥ contract model: Outside view = contract with other objects
- unimportant:
  - ➤ Implementation of an object

- Describe the abstraction first and think about the implementation later

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

2 Encapsulation

= Information Hiding
Concealing of the implementation of an abstraction from the users of the abstraction

- Complement to abstraction
  - ➤ Abstraction exposes the external properties of an object
  - ➤ Encapsulation hides the internals
- Fundamental for abstraction

  B. Liskov *For abstraction to work, implementations must be encapsulated*
- Encapsulation & object orientation
  - ◆ Representation of the object state
  - ◆ Implementation of the methods

→ Abstract data type

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

3 Abstract Data Type

? How can we provide a complete, precise & unambiguous description of an abstraction?

- ADT: Model to describe
  - ➤ Properties of data structures (Semantics!)
  - ➤ Operations of the data + semantic effects
  - ➤ NOT: Implementation of the data structures
- Specification → Description of all essential properties
- Overspecification: Details about the representation/implementation

→ ADT & object orientation
- ◆ Class = Implementation of an ADT
- ◆ Data abstraction: Object state is accessible only through methods

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

3 Abstract Data Type (2)

- Example: Specification of an ADT “Stack”

```
TYPES
        STACK[X]

FUNCTIONS
        empty: STACK[X] → BOOLEAN
        new: → STACK[X]
        push: X × STACK[X] → STACK[X]
        pop: STACK[X] → STACK[X]
        top: STACK[X] → X

PRECONDITIONS
        pre pop(s: STACK[X]) = (not empty(s))
        pre top(s: STACK[X]) = (not empty(s))

AXIOMS
        ∀x:X, s:STACK[X]:
        empty(new())
        not empty(push(x,s))
        top(push(x,s)) = x
        pop(push(x,s)) = s
```


Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

3 Abstract Data Type (3)

- Data abstraction in OOP
  - ➔ the object state is accessible only through the methods of the object



object as implementation of an ADT



object without data abstraction

- Data abstraction in C++ and Java
  - ◆ Scope rules (private / protected)

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

4 Modularity

Partitioning a program into individual components can reduce its complexity

- ◆ Problem partitions are easier to comprehend
- ◆ Different problem partitions may be assigned to different developer teams
- ◆ Module = separate unit in development

- most important: partitioning creates boundaries = interfaces
  - ➔ well-defined
  - ➔ documented

  } invaluable for the comprehension of the whole problem

- Many programming languages make a difference between interface and implementation of a module
- Structured Design: Grouping of subprograms
- OOD: Grouping of classes and objects (from the design's logical structure)

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

5 Hierarchy

- ◆ Abstraction & encapsulation help to hide details of components
- ◆ Modularity helps to cluster related abstractions

- Comprehension of large problems still difficult
  - ➔ too many abstractions
  - ➔ additional means to organize abstractions
- Abstractions often form hierarchies
  - ➤ common properties → more general abstractions
  - ➤ differences → specialization
  - ➔ Hierarchy: Ordering of abstractions
- Hierarchy & object orientation
  - ➤ Class structure: Inheritance → "is a" hierarchy
  - ➤ Object structure: Aggregation → "part of" hierarchy

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

6 Typing

- Concept derives primarily from the theory of ADTs

  Booch: *Typing is the enforcement of the class of an object, such that objects of different types may not be interchanged, or at most, they may be interchanged only in very restricted ways*

- Typing enables a programming language to check and enforce design decisions
  - ➔ essential for programming-in-the-large [Weg87]
- Strong typing:
  Conformance of all types in an expression is guaranteed
  - ➔ Static typing:
    conformance checked completely at compilation time
    - ➤ less flexibility
      - cannot detect compatible types
      - cannot support dynamic binding
  - ➔ More flexibility with polymorphism and genericity

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

7 Type Hierarchy

- Often 1:1 relationship between classes and types — but not necessary
  - ➤ different classes may implement the same type
  - ➤ one class may implement different types
- Hierarchy of classes: superclass ← subclass
  - ◆ Objective: code inheritance
  - ◆ Subclass not necessarily confirming to the type of the superclass
- Hierarchy of types: supertype ← subtype
  - ◆ Objectives: – behavior inheritance
    – declaration of conformable types (➔ polymorphism)
- Type inheritance (subtyping) as means for deriving types
  - ➔ Relationship between types becomes comprehendible
    - ➤ allows the identification of conformable types

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

8 Polymorphism

- Polymorphism = *the ability to take several forms*
  - ➤ various types for values or variables
  - ➤ various types for the parameters of functions
  - ➤ various types for the operands of an operator
- Example:

  operator "+" works with operands of type **`int`** and **`real`**
- Classification

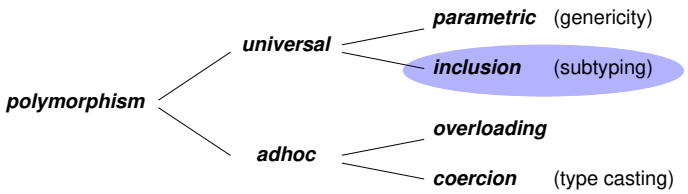

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

9 Polymorphism in C++

- Overloading polymorphism
  - ➤ Function-name overloading
  - ➤ Operator overloading
- Inclusion polymorphism
  - ➤ public inheritance
- Coercion polymorphism
  - ➤ Cast operator

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

9 Polymorphism in C++ (2)

- ★ **Function-name Overloading**
- several functions with the same name but different signature within one scope
- compiler selects the proper function
  - ➔ static binding (*early binding*)
- Example:

```
int max (int a, int b) { return((a>b):a?b); }
float max (float a, float b) { return((a>b):a?b); }
char *max (char *a, char *b) {
        if ((strcmp(a,b)> 0) return a; else return b; }
```

- Special cases:
  - ➤ several constructors for a class
  - ➤ operator overloading
  - ➤ overloading of a method in the context of inheritance

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

9 Polymorphism in C++ (3)

★ **Cast Operator / Coercion Polymorphism**

- In most programming languages automatic type conversion for basic types (e.g. short → int → double ← float)
- Cast operator (cast method) allows the definition of an explicit conversion of the class type into another type

```
class::operator type(void) { ... }
```

- Cast operator is like a normal unary operator

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

9 Polymorphism in C++ (4)

★ **Cast operator — Example**

```
class time
{
  private:
    int hour, min, sec;
  public:
    ...                                  // Konstruktor

    operator long () {                   // cast-Operator
      return(hour*3600 + min*60 + sec);
    }
};
main() {
  time now(1,10,2);
  long t;

  t = now + 10;                    // ⇒ t == 4212
...
```


Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

9 Polymorphism in C++ (5)

★ Inclusion Polymorphism — *THE Polymorphism in OOP*

Inheritance + Virtual Methods + Object References

- Object reference (pointer) has a type (= class)
  - ◆ instances of this class and all of its subclasses may be assigned to the ref.
  - ◆ on method invocation, the actual implementation of the method is designated not by the class of the pointer but by the class of the current object

➔ You may always assign any type-conformable object to an object reference and everything will work

- ◆ you may pass it as parameter to a method
- ◆ the programmer of the method did not need to know anything about your new subtype — as long as it conforms to the supertype his method expects

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

9 Polymorphism in C++ (6)

★ **Virtual Methods & Inclusion Polymorphism — Example:**

```
class geo_obj {                          // general superclass
  public:
    virtual void draw();
};

class circle : public geo_obj {          // subclass
  public:
    void draw();
}

class square : public geo_obj {          // subclass
  public:
    void draw();
}

main () {
  geo_obj *ptr;
  ptr = new circle;
  ptr->draw();
...
```


Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

10 Types & C++ Abstract Classes

- Superclass declares methods and its signatures but does not define them
  - **pure virtual functions**
  - ➔ superclass defines only a type
- Subclasses define various implementations of the methods
  - ➔ each subclass is one implementation of the type
- Not possible to instantiate objects from the superclass
- Example:

```
class geo_obj {                    // abstract calss
  public:
    virtual void draw() = 0;       // pure virtual function
};
class circle : public geo_obj {    // subclass
  public:
    void draw() { ... }
}
```


Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

11 Types & Java Abstract Classes

- As in C++
  - instantiation not possible
  - missing parts have to be completed in the subclass
- Example:

```
abstract class geo_obj {              // abstract class
  public abstract void draw();        // pure virtual function
};
class circle extends geo_obj {        // subclass
  public void draw() { ... }
}
```


Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

12 Types & Java Interfaces

- 2 possibilities to declare a type
  - ◆ by a class definition
    - ➔ class inheritance automatically leads to type inheritance
  - ◆ by a interface declaration
    - ➔ separate type declaration
- Example:

```
public interface Printable {
    public void Print();
}

public class MyPoint extends Object implements Printable {
    ....
    public void Print() {
        System.out.println("x="+x+" y="+y);
    }
}
```


Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

12 Types & Java Interfaces (2)

- Inheritance + multiple inheritance for interfaces
- One class may implement several types
- Type conformance is transitive
- Exceptions are an element of the type interface
- Examples:

```
interface Streamable extends FileIO, Printable {
    // additional Methods
    public void test() throws TestException;
}

class Test implements Streamable, Testinterface {
    ...
}
```


Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

13 Genericity

Concept that allows the definition of the type of some unit of the programming language at invocation or instantiation by a parameter

- OOP: generic classes ➔
  generic class ➔ instantiation (+ parameterization) ➔ actual class
  actual class ➔ instantiation of objects
- Example:
  - ◆ general stack class
    - ➤ int stack
    - ➤ real stack
    - ➤ string stack
- Most benefit of genericity can also be achieved by inheritance
- Implemented in Ada, Eiffel and C++ (*Templates*)

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

14 Genericity & C++: Templates

- Objective: definition of a class without finalization of types
  - ➤ dynamic type checking at run time or
  - ➤ static type checking at compile time + parameterizable classes
- Template = parameterizable class
- Example:

```
template <class T> class stack {
  private:
    int index;
    T *array;
  public:
    void stack(int n)
              { index = 0; array = new T[n]; }
    void push(T elem)
              { array[index++] = elem; }
    T pop(void)
              { return(array[index--]); }
};
```


Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

14 Genericity & C++: Templates

- Parameterization of class on object instantiation
- Examples:
  - ◆ Instantiation and usage of a stack with elements of type float:

```
stack <float> s(10);
float a;
s.push(a);
a = s.pop( );
```

  - ◆ Instantiation and usage of a stack with elements of type integer:

```
stack <int> s(10);
...
```


Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

15 Concurrency

Several threads of control are processed in parallel on different processors or quasi-parallel on one single processor

- Concurrency is orthogonal to object orientation (in general)
  but: concurrent solutions are much more complex than sequential ones
- Granularity: concurrency / objects (capsules)
  - ➤ Finer grained concurrency
    - ➔ even object-internal concurrency
  - ➤ Coarser grained concurrency
    - ➔ just object-external concurrency
- Integration of concurrency control into OO programming languages
  - ➤ orthogonal languages
  - ➤ non-orthogonal languages
    – uniform / non-uniform languages

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

16 Concurrency & Java

- Thread concept and synchronization mechanisms are integrated
  - ➥ non-orthogonal, non-uniform language
- Creation of threads via thread class
- Example:

```
class MyClass implements Runnable {
       public void run()  {
              System.out.println("Hello\n");
       }
}

....
MyClass o1 = new MyClass();    // create object
Thread t1 = new Thread(o1);    // create thread to run in o1

t1.start();                    // start thread

Thread t2 = new Thread(o1);    // create second thread to run in o1

t2.start();                    // start second thread
```


Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

16 Concurrency & Java (2)

★ **Synchronization**

- Monitors: exclusive execution of methods of an object
  - ◆ Example:

```
class Bankkonto {
    int value;
    public synchronized void AddAmmount(int v) {
        value=value+v;
    }
    public synchronized void RemoveAmmount(int v) {
        value=value-v;
    }
}
...
Bankkonto b=....
b.AddAmmount(100);
```

- Conditions: releasing a monitor while waiting on an event

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

17 Persistence

★ **Motivation for Persistence** [ABC83]

- "active" data → programming language facilities / run-time environment
- "passive" data → DBMS or file system

➔ 2 different views of data

➔ Disadvantages for the programmer

- ➤ Conversion between active and passive data necessary
- ➤ Data type protection of programming language is lost

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.

17 Persistence (2)

★ **General Definition**

- Persistence is the property of data through which
  its existence transcends time
  (i. e. it continues to exist after its creator ceases to exist)
  and/or space
  (i. e. its location moves from the address space in which it was created).

★ **Spectrum of Persistence**

1. Transient results in expression evaluation
2. Local variables in procedure activations
3. Global variables and heap items whose extent is different from their scope
4. Data that exists between executions of a program
5. Data that exists between various versions of a program
6. Data that outlives the program

Reproduktion jeder Art oder Verwendung dieser Unterlage, außer zu Lehrzwecken an der Universität Erlangen-Nürnberg, bedarf der Zustimmung des Autors.